


Installing HWN Phone Jacks




The HWN Phone Jack allows you to connect standard telephones, modems, FAX machines, and answering machines to your Home Wireless Networks communications system.

Note: The network Controller must already be installed and incoming phone lines connected to it in order to add a Phone Jack to the network.

1 *Connect the Phone Jack*

1. Write down the Phone Jack serial number. You will need this information in order to register the jack with the Controller. The serial number is located on the jack label.
2. Plug the phone line from the standard telephone, FAX machine, etc., into the Phone Jack.
3. Plug the Phone Jack into a standard 120v power outlet.

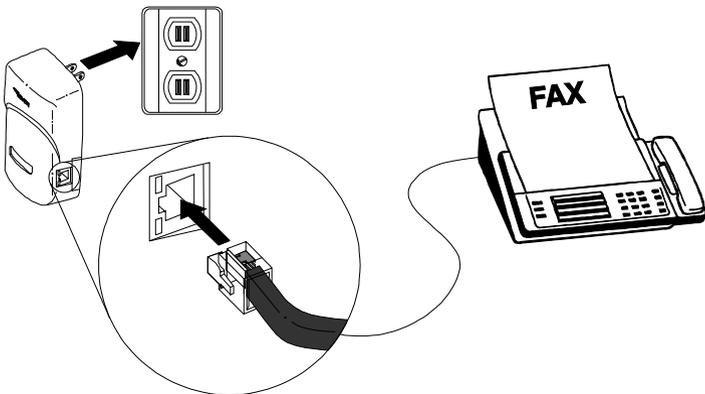

2 Register the Phone Jack with the Controller

You can register a new Phone Jack from either a Handset or a network PC. The following procedure describes the registration process using a Handset. For information on registering a Phone Jack from a network PC, see the Network Reference Manual that came with the Controller.

1. From a Handset that is already registered with the Controller, press and release **MENU** until you reach the screen containing the Setup option.
2. Press **9** (Setup).
3. Enter your Controller password, then press **END**. (For password information, see the Network Reference Manual that accompanied the Controller.)
4. Press **2** (Network).
5. Press **2** (Phone Jacks).
6. Press **1** (Add).
7. Enter the **last eight digits** of the Phone Jack serial number. Press **END** when finished.

Note: The serial number is located on the label on the jack.

8. The new jack will be added with a default name of “ExtXX,” where “XX” is the next available extension number. Press **END** to accept the default name or use the keypad to overwrite the default name with a new name. Press **END** when finished entering the new name.

Note: Device names can be up to 12 characters in length.

Example

To enter the name “Tom:”

1. Press **8** one time to add “T”;
2. Press **6** three times to add “o”;
3. Press **#** to advance to the next space;
4. Press **6** one time to add “m”;

5. Press **#** to advance to the next space;
 6. Press **0** as many times as necessary to delete the remaining unwanted text;
 7. Press **END** when finished.
-
9. When asked to confirm that the serial number and name are correct, press **1** (Yes) to continue or **2** (No) to re-enter the data.
 10. Press **0** when finished.

Note: The green LED on the Phone Jack illuminates when it is receiving power and is in communication with the network Controller.

Safety Instructions

When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and injury.

1. Read and understand all instructions.
2. Follow all warnings and instructions marked on the product.
3. Do not use this product near water or when you are wet (for example, near a bath tub, kitchen sink, laundry tub, wash bowl, wet basement, or swimming pool). Unplug this product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning. Do not plug the product back in until it is thoroughly dry.
4. Avoid using a telephone (other than a cordless one) during an electrical storm. There may be a remote risk of electric shock.
5. Do not use a telephone in the vicinity of a gas leak. If you suspect a gas leak, report it immediately using a telephone located away from the area where the gas is leaking. Also make sure the Controller unit is located away from the area of the suspected leak.
6. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power that is supplied to your location, consult your dealer or local power company.
7. Do not overload the wall outlets or extension cords as this can result in the risk of fire or electric shock.
8. Do not allow anything to rest on the power cord. Do not locate this product where the cord will be abused by people walking on it.
9. This product must **not** be installed in an attic, garage, or other temperature-extreme environment.
10. To reduce the risk of electric shock, do not disassemble the telephone equipment. Opening or removing covers may expose you to dangerous voltages or other risks. Incorrect reassembly could cause electric

shock. If service or repair work is required, take the unit to a qualified technician.

11. Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions:

- The power cord is damaged or frayed.
- Liquid has been spilled into the product.
- The product has been exposed to rain or water.
- The product has been dropped or the enclosure has been damaged.
- The product exhibits a distinct change in performance
- The product does not operate normally by following the operating instructions.

Use with medical devices

This device operates in the frequency range of 902-928 MHz and has a power output level that ranges from 0.001 to 0.10 watts. Before installing and using the device in a location where personal medical devices such as pacemakers, etc., are in use, consult the manufacturer of the medical devices to determine if it is adequately shielded from external RF (radio frequency) energy in the indicated range. Do not use this unit in health-care facilities when regulations posted in the area so indicate. Hospitals or health-care facilities may be using equipment that could be sensitive to external RF (radio frequency) energy.

Preventing static electricity damage

The components inside your system are extremely sensitive to static electricity, also known as electro-static discharge (ESD). Static electricity can cause irreparable damage to your system. You can help prevent such damage by taking the following precautions:

- Avoid placing static-causing surfaces such as plastic and Styrofoam near this unit.
- Avoid sliding this unit across any surface.

Regulatory Information

Interference Information

Some telephone equipment generates, uses, and can radiate radio frequency energy, and if not installed and used properly, may cause interference to radio or TV reception.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Note: Privacy of communications may not be ensured when using this device.

Warranty Information

Limited Warranty, Disclaimer And Limitation Of Liability

Home Wireless Networks, Inc. (“HWN”) warrants that this product will be free from defects in material and workmanship for a period of one (1) year from the date of purchase by the original consumer purchaser of the product. If a product is found defective during the warranty period, Home Wireless Networks, Inc. will repair or replace (at HWN’s option) the product with the same or a similar model, which may be a reconditioned unit, without charge for parts or labor. Any replaced or repaired product will have either a ninety (90) day warranty, under the conditions described herein, or the remainder of the initial one (1) year warranty, whichever is longer.

If you need warranty service, you must, prior to the lapse of the applicable warranty period, file a claim, together with proof of purchase and confirmation from you that you are the original purchaser of the product, with HWN at 1-888-WHY-WIRE.

After a warranty claim is properly filed, HWN will designate a representative to evaluate the warranty claim. This warranty is conditioned upon your reasonably cooperating with HWN in the evaluation of your warranty claim and the implementation of any remedy. When supplying replacement product or parts under this warranty, HWN reserves the right to substitute product or parts of comparable value and design for any discontinued designs. This warranty is not transferable and applies only to the original consumer purchaser. HWN will not honor this warranty if there is any evidence of tampering with the product. This warranty does not cover, and HWN will not be liable for, and does not assume any responsibility for, any breakages, damages or failures caused by misuse, abuse, acts of God, negligence, accidents, improper installation or other causes beyond HWN’s control. HWN EXCLUDES AND WILL NOT PAY ANY INCIDENTAL AND CONSEQUENTIAL DAMAGES. By this HWN means any loss, expense or damage other than to the product itself that may result from a defect in the product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

THE DURATION OF ANY IMPLIED WARRANTIES IS LIMITED TO THE DURATION OF THE COVERAGE PROVIDED BY THIS LIMITED WARRANTY AS INDICATED IN THE ABOVE CHART; PROVIDED, HOWEVER, THAT NOTHING IN THIS LIMITED WARRANTY SHALL GIVE

YOU ANY IMPLIED WARRANTIES YOU WOULD NOT OTHERWISE HAVE, EXTEND THE SAME BEYOND THEIR CUSTOMARY DURATION, OR MAKE HWN LIABLE FOR ANY IMPLIED WARRANTIES THAT IT WOULD NOT BE LIABLE FOR IF THIS LIMITED WARRANTY HAD NOT BEEN GIVEN. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

This warranty shall apply only to product that is purchased and installed within the United States. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state.

Return Instructions

Should a Home Wireless Networks system component fail during the 12-month warranty period, contact your HWN Customer Service Representative at 1-888-WHY-WIRE for instructions on returning the failed component. You will be responsible for shipping charges, if any, and for presenting proof of the original purchase date.



Global Headquarters

3145 Avalon Ridge Place, Suite 200
Norcross GA USA 30071

1-888-WHY-WIRE (949-9473)

www.homewireless.com

©1999 Home Wireless Networks, Inc.
All rights reserved.

Part Number: 84-0003-000 A019
Printed in USA



84-0003-000